



TOOLS

MAGNETIC SQUARE


MSQ-01 25LBS/50LBS/75LBS



MSQ-02 30LBS/55LBS



MSQ-03 30LBS/55LBS



MSQ-04 9LBS



MSQ-05 25LBS/50LBS/75LBS



MSQ-06 45LBS



MSQ-07 30LBS/90LBS



MTS-01



MIG torch stand

TTS-01



TIG torch stand

INSPECTION MIRROR

IMI-01



IMI-02



IMI-03



IMI-04



ROD CANNISTER/CORNER CLAMP


RCA-01



RCA-02



WCC-01



WCC-02



CYLINDER KEY



CK-01



CK-02



CK-03



CK-04



CK-05



CK-06

SPARK LIGHTER/FLINT



SL-01



SL-02



SL-03



SL-04



SL-05



SL-06



SL-01F



SL-01B



SL-03F

TIP CLEANER



TC-08



TC-08A



TC-08W



TC-09



TC-10



TC-12A



TC-04

SOAPSTONE HOLDER/SOAPSTONE



SH-01



SH-02




75 x 10 x 5
75 x 10 x 10
80 x 5 x 5
80 x 13 x 5
100 x 10 x 10
100 x 13 x 5
125 x 12 x 5
127 x Ø6.4
127 x 6.4 x 6.4
127 x 13 x 5




TOOLS

WELDING GAUGE


WGA-01



WGA-02

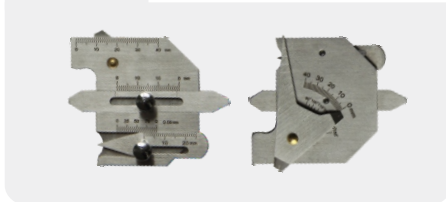

WGA-03

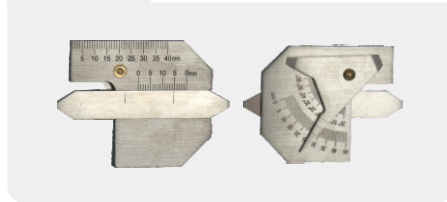


WGA-04



WGA-05



WGA-06

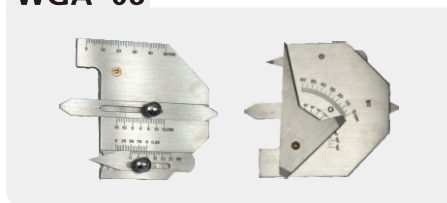

WGA-07



WGA-08




WGA-09



WGA-10



WGA-11

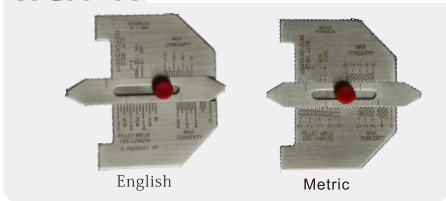


WGA-12



WGA-13



WGA-14

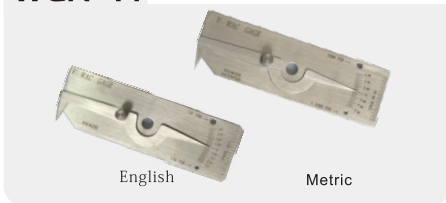

WGA-15



WGA-16



WGA-17



WGA-18



WGA-19


WGA-20


WGA-21

WGA-22

WGA-23

WGA-24

WGA-25

WGA-26

WGA-27

WGA-28

WGA-29

WGA-30


MIG PLIERS / MIG NOZZLE REAMER

MP-01

MP-02

MR-01


CHIPPING HAMMER

CH-01


300g/500g


CH-02

CH-03

CH-04


F CLAMP

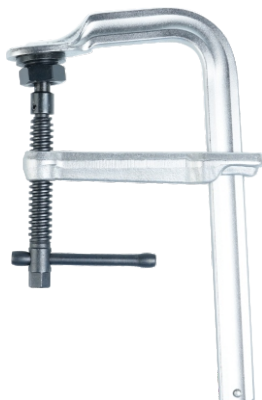

Item No.	Clamping Capacity Inches (mm)	Throat Depth Inches (mm)	Rail Size mm	Clamp Pressure lbs.(kg.)	Pad
LS271312008	8(200)	4.7(120)	27 x 13	1200(550)	standard
LS271312010	10(250)	4.7(120)	27 x 13	1200(550)	standard
LS271312012	12(300)	4.7(120)	27 x 13	1200(550)	standard
LS301514008	8(200)	5.5(140)	30 x 15	2400(1100)	standard
LS301514010	10(250)	5.5(140)	30 x 15	2400(1100)	standard
LS301514012	12(300)	5.5(140)	30 x 15	2400(1100)	standard
LS301414016	16(400)	5.5(140)	30 x 15	2400(1100)	standard
LS301514020	20(500)	5.5(140)	30 x 15	2400(1100)	standard
LS301414024	24(600)	5.5(140)	30 x 15	2400(1100)	standard
LS301514032	32(800)	5.5(140)	30 x 15	2400(1100)	standard
LS301514040	40(1000)	5.5(140)	30 x 15	2400(1100)	standard
LS301514008S	8(200)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS301514010S	10(250)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS301514012S	12(300)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS301514016S	16(400)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS301514020S	20(500)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS301514024S	24(600)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS301514032S	32(800)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS301514040S	40(1000)	5.5(140)	30 x 15	2400(1100)	hex 3pcs swivel
LS421917812S	12(300)	7(178)	42 x 19	4800(2200)	hex 3pcs swivel
LS421917816S	16(400)	7(178)	42 x 19	4800(2200)	hex 3pcs swivel
LS421917820S	20(500)	7(178)	42 x 19	4800(2200)	hex 3pcs swivel
LS421917824S	24(600)	7(178)	42 x 19	4800(2200)	hex 3pcs swivel
LS421917832S	32(800)	7(178)	42 x 19	4800(2200)	hex 3pcs swivel
LS421917840S	40(1000)	7(178)	42 x 19	4800(2200)	hex 3pcs swivel
LS421917848S	48(1200)	7(178)	42 x 19	4800(2200)	hex 3pcs swivel

LOCKING PLIERS

LP-01



LP-02



LP-03



LP-04



LP-05



LP-06



WELDING MACHINE TROLLEY



WMT-01



WMT-02



WMT-03

INFRA RED DIGITAL THERMOMETER




IDT-01

Features: Laser targeting
Automatic Data Hold
Auto Power Off
White Backlit LCD Display
Overrange Indication
Trigger Lock
Max, Min, DIF, AVG record
High and low alarm
Adjustable emissivity
Type K temp measurements
Optical Resolution (Distance to spot size) 30:1

Specifications:
IR Temp. Range: -50°C to 800°C (-58°F to 1472°F)
IR Temp. Resolution: $0.1^{\circ}\text{C}/^{\circ}\text{F}$
Type K Temp. Range: -50°C to 1370°C (-58°F to 2498°F)
Response Time: Less than 150ms
Basic Accuracy: $\pm 1.5\%$ of reading
Emissivity: Adjustable 0.1~1.0

CYLINDER RACK

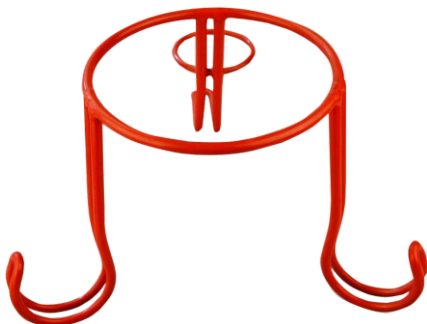

CR-1

GAS TESTER



GT-01